

设计特点

- 1、ISO5211平台连接；2、阀杆防飞出设计；3、防静电装置；
4、上密封可调功能；5、球体固定设计；6、防火结构设计；
7、斜阀杆设计；8、壳体脱蜡精密铸造

国标设计标准

- 1、法兰连接：HG/T-20592、GB/T-9113；
2、结构长度：GB/T-12221；3、壁厚标准：GB/T-26640；
4、设计制造：GB/T-12237；5、检验试验：GB/T-26480

日标设计标准


- 1、法兰连接：JIS B2220；2、结构长度：ASME B16.10；
3、壁厚标准：ASME B16.34；4、设计制造：API 6D/608；
5、检验试验：API 598

美标设计标准

- 1、法兰连接：ASME B16.5；2、结构长度：ASME B16.10；
3、壁厚标准：ASME B16.34；4、设计制造：API 6D/608；
5、检验试验：API 598


德标设计标准


- 1、法兰连接：EN 1092-1；2、结构长度：DIN 3202-F4；
3、壁厚标准：ASME B16.34；4、设计制造：DIN 3357；
5、检验试验：API 598

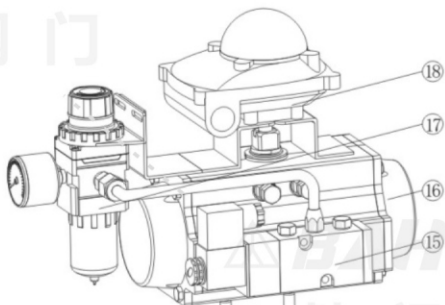

19	电装执行器	防爆	常规
18	限位开关	防爆	隔爆
17	过滤器	常规	常规
16	执行器	单作用	双作用
15	电磁阀	防爆	隔爆
14	外六角	A193-B8	A193-B8
13	压盖	CF8	CF8
12	填料	TFM1600/RPTFE	TFM1600/RPTFE
11	O型圈	VITON/NBR	VITON/NBR
10	止推垫片	TFM1600/RPTFE	TFM1600/RPTFE
9	阀杆	304	304
8	防静电	SS	SS
7	螺母	A194-8	A194-8
6	连接螺栓	A193-B8	A193-B8
5	球体	304	304
4	密封垫	TFM1600/RPTFE	TFM1600/RPTFE
3	阀座	TFM1600/RPTFE	TFM1600/RPTFE
2	阀盖	CF8M	CF8
1	阀体	CF8M	CF8

19	电装执行器	防爆	常规
18	限位开关	防爆	隔爆
17	过滤器	常规	常规
16	执行器	单作用	双作用
15	电磁阀	防爆	隔爆
14	外六角	A193-B8	A193-B8
13	压盖	CF8	CF8
12	填料	TFM1600/RPTFE	TFM1600/RPTFE
11	O型圈	VITON/NBR	VITON/NBR
10	止推垫片	TFM1600/RPTFE	TFM1600/RPTFE
9	阀杆	304	304
8	防静电	SS	SS
7	螺母	A194-8	A194-8
6	连接螺栓	A193-B8	A193-B8
5	球体	304	304
4	密封垫	TFM1600/RPTFE	TFM1600/RPTFE
3	阀座	TFM1600/RPTFE	TFM1600/RPTFE
2	阀盖	CF8M	CF8
1	阀体	CF8M	CF8

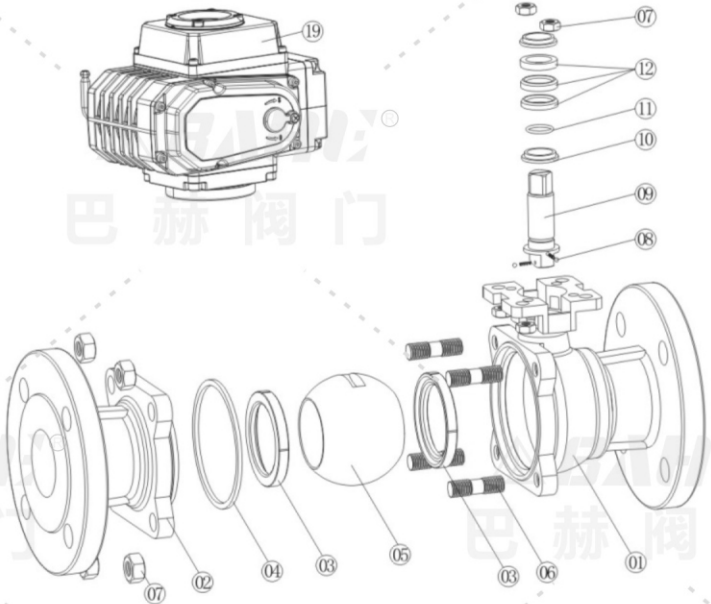

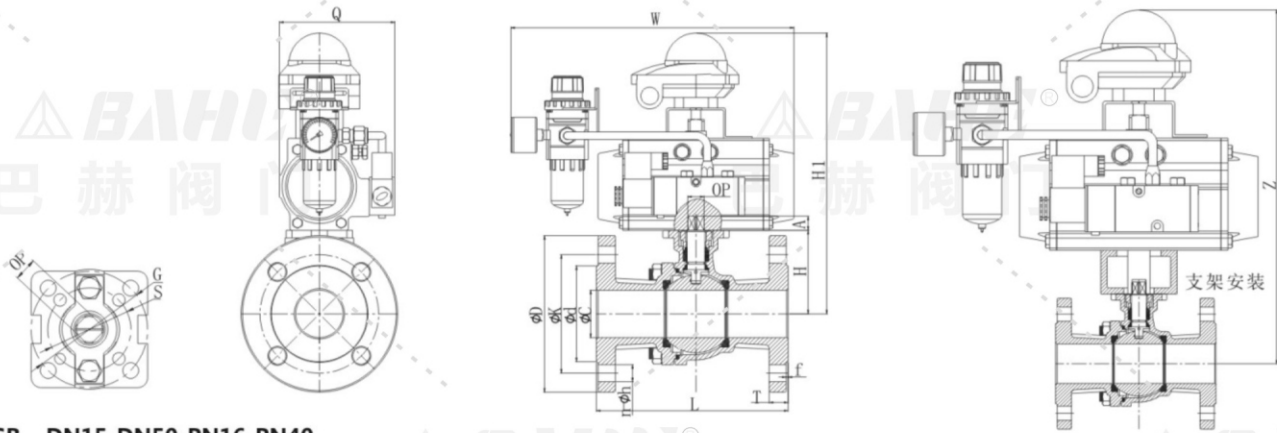

> GB DN15-DN50-PN16-PN40

规格	PN	D	k	d	C	L	T	f	n-øh	H	A	OP	G	S	Q	W	H1	Z
DN15	16-40	95	65	45	15	130	16	2	4-14	51	9	9	50	36	100	248	275	315
DN20	16-40	105	75	58	20	130	18	2	4-14	54	9	9	50	36	110	280	292	337
DN25	16-40	115	85	68	25	140	18	2	4-14	67	11	11	50	42	125	297	317	362
DN32	16-40	140	100	78	32	165	18	2	4-18	72	11	11	50	42	130	305	332	377
DN40	16-40	150	110	88	38	165	18	2	4-18	78	14	14	70	50	130	305	338	393
DN50	16-40	165	125	102	50	203	20	2	4-18	88	14	14	70	50	139	350	358	413

> GB DN65-DN250-PN16

规格	PN	D	k	d	C	L	T	f	n-øh	H	A	OP	G	S	Q	W	H1	Z
DN65	PN16	185	145	122	64	222	20	2	4-18 8-18	116	17	17	102	70	150	380	400	480
DN80	PN16	200	160	138	76	241	20	2	8-18	122	17	17	102	70	170	430	427	507
DN100	PN16	220	180	158	100	305	22	2	8-18	153	22	22	125	102	180	505	475	550
DN125	PN16	250	210	188	125	356	22	2	8-18	174	22	22	125	102	200	570	521	600
DN150	PN16	285	240	212	150	394	24	2	8-22	210	27	27	140	125	236	625	590	690
DN200	PN16	340	295	263	200	457	24	2	12-22	267	36	36	140	125	256	657	671	771
DN250	PN16	405	355	320	250	533	26	2	12-26	299	36	36	165	140	290	760	742	842

> GB DN65-DN200-PN25-PN40

规格	PN	D	k	d	C	L	T	f	n-øh	H	A	OP	G	S	Q	W	H1	Z
DN65	25-40	185	145	122	64	222	22	2	8-18	114	17	17	102	70	170	420	425	500
DN80	25-40	200	160	138	76	241	24	2	8-18	124	17	17	102	70	180	505	432	512
DN100	25-40	235	190	162	100	305	24	2	8-22	147	17	17	102	70	200	570	503	583
DN125	25-40	270	220	188	125	356	26	2	8-26	179	22	22	125	102	236	625	560	640
DN150	25-40	300	250	218	150	394	28	2	8-26	207	27	27	125	102	256	657	612	712
DN200	25	360	310	278	200	457	30	2	12-26	246	36	36	140	125	290	760	685	785
DN200	40	375	320	285	200	457	34	2	12-30	246	36	36	140	125	320	835	716	816

> GB DN15-DN40-PN64-PN100




规格	PN	D	k	d	C	L	T	f	n-øh	H	A	OP	G	S	Q	W	H1	Z
DN15	64-100	105	75	45	15	165	20	2	4-14	65	11	11	50	42	125	292	315	360
DN20	64-100	130	90	58	20	190	22	2	4-18	70	11	11	50	42	130	305	330	375
DN25	64-100	140	100	68	25	216	24	2	4-18	85	14	14	70	50	139	350	355	410
DN32	64-100	155	110	78	32	229	26	2	4-22	88	14	14	70	50	150	380	373	423
DN40	64-100	170	125	88	38	241	28	2	4-22	107	17	17	102	70	150	380	392	472

> GB DN50-DN100-PN64

规格	PN	D	k	d	C	L	T	f	n-øh	H	A	OP	G	S	Q	W	H1	Z
DN50	PN64	180	135	102	50	292	26	3	4-22	107	17	17	102	70	170	430	412	492
DN65	PN64	205	160	122	64	330	26	3	8-22	128	22	22	125	102	180	505	448	528
DN80	PN64	215	170	138	76	356	28	3	8-22	143	22	22	125	102	200	570	493	593
DN100	PN64	250	220	162	100	406	30	3	8-26	165	22	22	125	102	236	625	545	645

> GB DN50-DN100-PN100

规格	PN	D	k	d	C	L	T	f	n-øh	H	A	OP	G	S	Q	W	H1	Z
DN50	PN100	195	145	102	50	292	30	3	4-26	107	17	17	102	70	180	505	427	507
DN65	PN100	220	170	122	64	330	34	3	8-26	128	22	22	125	102	200	570	478	558
DN80	PN100	230	180	138	76	356	36	3	8-26	143	22	22	125	102	236	625	523	623
DN100	PN100	265	210	162	100	432	40	3	8-30	165	22	22	125	102	256	657	570	670

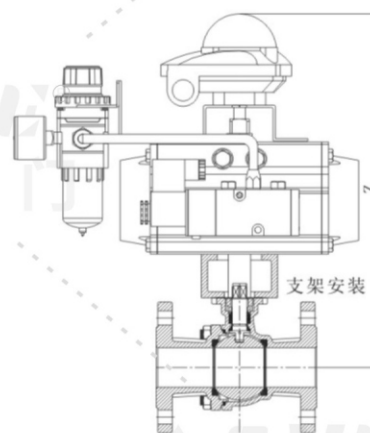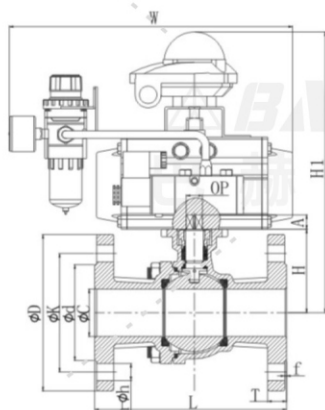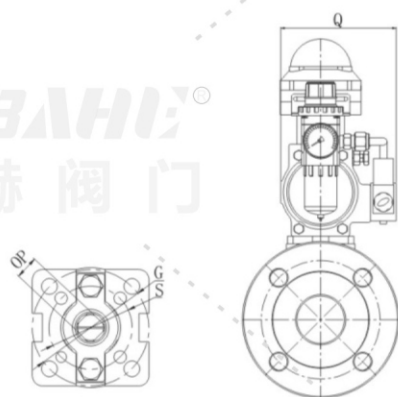

> ASME-1"-8"-150LB

规格	LB	D	k	d	C	L	T	f	n-øh	H	A	OP	G	S	Q	W	H1	Z
1/2"	150LB	90	60.3	34.9	15	108	11.6	2	4-16	51	9	9	50	36	100	248	275	315
3/2"	150LB	100	69.9	42.9	20	117	13.2	2	4-16	55	9	9	50	36	110	280	292	337
1"	150LB	110	79.4	50.8	25	127	14.7	2	4-16	63	11	11	50	42	125	297	317	362
1 1/4"	150LB	115	88.9	63.5	32	140	16.3	2	4-16	71	11	11	50	42	130	305	332	377
1 1/2"	150LB	125	98.4	73	38	165	17.9	2	4-16	81	14	14	70	50	130	305	338	393
2"	150LB	150	120.7	92.1	50	178	19.5	2	4-19	88	14	14	70	50	139	350	358	413
2 1/2"	150LB	180	139.7	104.8	64	190	23	2	4-19	114	17	17	102	70	150	380	400	480
3"	150LB	190	152.4	127	76	203	24.3	2	4-19	124	17	17	102	70	170	430	427	507
4"	150LB	230	190.5	157.2	100	229	24.3	2	8-19	147	17	17	102	70	180	505	475	550
5"	150LB	255	215.9	185.7	125	356	24.3	2	8-22	179	22	22	125	102	200	570	526	600
6"	150LB	280	241.3	215.9	150	394	26	2	8-22	207	27	27	125	102	236	625	587	690
8"	150LB	345	298.5	269.9	200	457	29	2	8-22	246	36	36	140	125	256	657	650	771

> ASME-1"-6"-300LB

规格	LB	D	k	d	C	L	T	f	n-øh	H	A	OP	G	S	Q	W	H1	Z
1/2"	300LB	95	66.7	34.9	15	140	14.7	2	4-16	51	9	9	50	36	110	280	291	336
3/2"	300LB	115	82.6	42.9	20	152	16.3	2	4-19	60	9	9	50	36	125	292	310	365
1"	300LB	125	88.9	50.8	25	165	17.9	2	4-19	63	11	11	50	42	130	305	323	378
1 1/4"	300LB	135	98.4	63.5	32	178	19.5	2	4-19	71	11	11	50	42	139	350	341	396
1 1/2"	300LB	155	114.3	73	38	190	21.1	2	4-22	81	14	14	70	50	139	350	351	430
2"	300LB	165	127	92.1	50	216	22.7	2	8-19	88	14	14	70	50	150	380	373	453
2 1/2"	300LB	190	149.2	104.8	64	241	25.9	2	8-22	114	17	17	102	70	170	430	420	500
3"	300LB	210	168.3	127	76	283	29	2	8-22	124	17	17	102	70	180	505	432	512
4"	300LB	255	200	157.2	100	305	32.2	2	8-22	147	17	17	102	70	200	570	503	583
5"	300LB	280	235	185.7	125	381	35.4	2	8-22	179	22	22	125	102	236	625	560	640
6"	300LB	320	269.9	215.9	150	403	37	2	12-22	207	27	27	125	102	256	657	612	712

> ASME-1"-4"-600LB

规格	LB	D	k	d	C	L	T	f	n-øh	H	A	OP	G	S	Q	W	H1	Z
1/2"	600LB	95	66.7	34.9	15	165	21.3	7	4-16	65	11	11	50	42	125	292	315	370
3/2"	600LB	115	82.6	42.9	20	190	23	7	4-19	70	11	11	50	42	130	305	330	385
1"	600LB	125	88.9	50.8	25	216	24.5	7	4-19	85	14	14	70	50	139	350	355	410
1 1/4"	600LB	135	98.4	63.5	32	229	27.7	7	4-19	88	14	14	70	50	150	380	373	423
1 1/2"	600LB	155	114.3	73	38	241	29.3	7	4-22	107	17	17	102	70	150	380	392	472
2"	600LB	165	127	92.1	50	292	32.4	7	8-19	107	17	17	102	70	180	505	427	507
2 1/2"	600LB	190	149.2	104.8	64	330	35.6	7	8-22	128	22	22	125	102	200	570	478	558
3"	600LB	210	168.3	127	76	356	38.8	7	8-22	143	22	22	125	102	236	625	523	623
4"	600LB	275	215.9	157.2	100	432	45	7	8-25	165	22	22	125	102	256	657	570	670

