


德标截止阀
DIN globe valve



www.bahe-valve.com

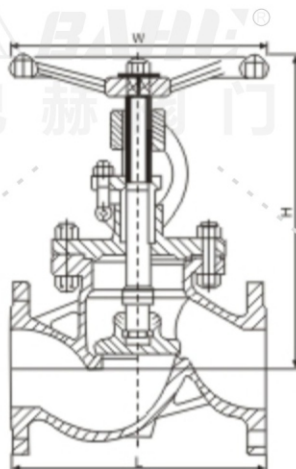

技术规范 specifications

结构形式 structure type	BB-BG-OS&Y
驱动方式 Drive way	手动 Manually
	电动 Electric
设计标准 Design standard	DIN3356
结构长度 Face to face	DIN3202
连接法兰 Flanged ends	DIN2542-2545
试验和检验 Test & inspection	DIN3230

注：系列阀门连接法兰根据用户要求设计制造。

Note: Series valve connecting flanges are designed and manufactured according to user requirements.

产品性能规范 Product performance specifications

公称压力 (MPa) Nominal pressure	壳体实验压力(MPa) Shell test pressure	密封试验压力(MPa) Seal test pressure	适用温度 (°C) proper temperature	适用介质 Applicable medium
1.6	2.4	1.76	-110-600°C	水、蒸汽、油品等 Water, steam, oil, etc.
2.5	3.75	2.75		
4.0	6.0	4.4		
6.4	9.6	7.04		

主要零件材料及性能 Material and performance of main parts

壳体 Case	GS-C25								1.4308		
阀瓣 Valve	GS-C25			1.4308		1.4308		Monel			
阀杆 Stem	13Cr			1.4308		1.4308		Monel	F304		
阀瓣密封面 Disc sealing surface	13Cr	13Cr	STL	1.4308	STL	1.4308	STL	Monel	1.4308	1.4308	STL
阀座密封面 Seat sealing surface	13Cr	13TL	STL	1.4308	STL	1.4308	STL	Monel	1.4308	STL	STL
壳体 Case	1.4408				1.4306				1.4301		
阀瓣 Valve											
阀杆 Stem	1.4408				1.4306				1.4301		
阀瓣密封面 Disc sealing surface	1.4408	1.4408	STL	1.4306	1.4306	1.4306	STL	1.4301	1.4301	1.4301	STL
阀座密封面 Seat sealing surface	1.4408	STL	STL	1.4306	1.4306	1.4306	STL	1.4301	STL	STL	STL

主要尺寸 Main dimensions

压力等级 (MPa) Pressure Level		PN1.6MPa															
口径DN	mm	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L		130	150	160	180	200	230	290	310	350	400	450	600	730	850	980	1100
H		240	260	276	285	300	305	354	402	437	496	541	699	815	914	1189	1350
W		120	140	160	160	180	200	200	250	250	300	350	400	450	500	550	600

压力等级 (MPa) Pressure Level		PN2.5MPa															
口径DN	mm	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L		130	150	160	180	200	230	290	310	350	400	450	600	730	850	980	1100
H		240	260	276	285	300	305	354	402	453	505	556	744	864	948	1269	1450
W		120	140	160	160	180	200	200	250	300	350	400	450	500	550	600	600

压力等级 (MPa) Pressure Level		PN4.0MPa															
口径DN	mm	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L		130	150	160	180	200	230	290	310	350	400	600	600	730	850	980	1100
H		240	260	276	285	300	325	370	430	480	432	783	783	888	965	1285	1512
W		120	140	160	160	180	200	200	250	300	350	450	450	500	550	600	600

压力等级 (MPa) Pressure Level		PN6.4MPa															
口径DN	mm	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L		130	150	160	180	200	300	340	380	430	500	550	650	775	900	1025	1150
H		240	260	276	285	300	305	354	402	437	495	541	699	815	914	1189	1350
W		120	140	160	160	180	200	200	750	250	300	350	400	450	500	550	600

压力等级 (MPa) Pressure Level		PN10.0MPa															
口径DN	mm	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L		130	150	160	180	200	300	340	380	430	500	550	650	775	900	1025	1250
H		240	260	276	285	300	305	363	415	453	505	556	744	864	948	1269	1450
W		120	140	160	160	180	200	200	250	300	350	400	450	500	550	600	600

压力等级 (MPa) Pressure Level		PN16.0MPa															
口径DN	mm	15	20	25	32	40	50	65	80	100	125	150	200	250	300	350	400
L		130	150	160	180	200	300	340	380	450	500	550	650	775	900	1025	1250
H		240	260	276	285	300	325	370	430	480	532	589	783	888	965	1285	1512
W		120	140	160	160	180	200	200	250	300	350	400	450	500	550	600	600