


日标截止阀
JIS globe valve



www.bahe-valve.com

J41HY型PN10K、20K

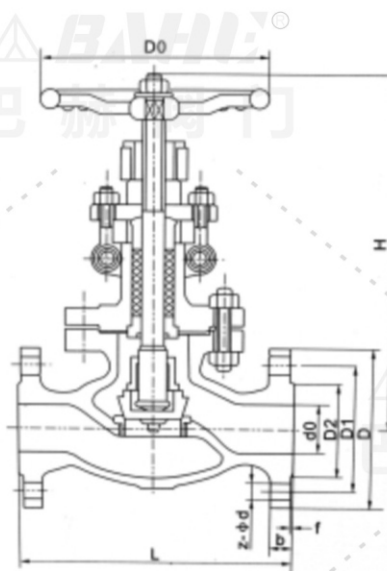

主要零件材料 Material of main parts

产品类型 product type	零件名称 Part name						
	阀体、阀盖 Body bonnet	阀杆 Valve stem	阀瓣 Disc	密封面 Sealing face	阀杆螺母 Stem nut	紧固件 fastener	手轮 Handwheel
10K型	25、WCB	铬不锈钢 Chrome stainless steel	2Cr13 25	H: 不锈钢 Y: 钴基硬质合金钢 H: stainless steel Y: Cobalt-based hard alloy steel	铝青铜 Aluminum bronze	优质碳钢 High quality carbon steel	可锻铸铁 Malleable cast iron
20K型	铬钼钢 Cr.Mo.steel	铬钼钢 Cr.Mo.steel	合金钢 Alloy steel	钴基硬质合金钢 Cobalt-based hard alloy steel	铝青铜 Aluminum bronze	合金钢 Alloy steel	可锻铸铁 Malleable cast iron

阀体材料 Body material	SCPH2	SCPH21/SCPH32	SCPL1	SCS13A	SCS14A	SCS19A	SCS16A
适用温度℃ proper temperature	≤425	≤540	-45-150	≤275	≤275	≤200	
适用介质 Applicable medium	水、蒸汽、 油品等介质 Water, steam, oil and other media	水、蒸汽、石油 石油制品等介质 Water, steam, Oil Petroleum products and other media	氧气、液氨等 腐蚀性介质 Oxygen, liquid ammonia, etc. Corrosive medium	工艺气、弱 酸类等介质 Process gas, weak acid and other media	硝酸、尿素等 腐蚀性介质 Nitric acid, urea, etc. Corrosive medium	酸、碱类 腐蚀性介质 Acids and alkalis Corrosive medium	尿素、甲铵液 等还原性介质 Urea, ammonium solution Reductive media

执行标准 Executive standard

项目 Item	产品设计 product design	压力温度额定值 Pressure temperature rating	结构长度 Structure length	连接尺寸 Connection size	检查验收 Inspection and acceptance
标准 standard	JIS B2071、JIS B2061	JIS B2071、JIS B2061	JIS B2002	JIS B2212、JIS B2214	JIS B2003

主要尺寸 Main dimensions

J41HY型 PN10K、20K

公称通径 DN/mm	尺寸 Size/mm									
	/In	d	L	D	D1	D2	b	Z-Ød	H	D0
15	1/2	15	108	95	70	52	12	4-Ø15	240	125
20	3/4	20	117	100	75	58	14	4-Ø15	240	125
25	1	25	127	125	90	70	14	4-Ø19	175	125
32	1 1/4	32	140	135	100	80	16	4-Ø19	242	125
40	1 1/2	40	165	140	105	85	16	4-Ø19	286	160
50	2	51	203	155	120	100	16	4-Ø19	360	200
65	2 1/2	64	216	175	140	120	18	4-Ø19	380	200
80	3	76	241	185	150	130	18	8-Ø19	415	250
100	4	102	292	210	175	155	18	8-Ø19	465	280
125	5	127	356	250	210	185	20	8-Ø23	515	300
150	6	152	406	280	240	215	22	8-Ø23	545	355
200	8	203	495	330	290	265	22	12-Ø23	675	400

主要尺寸 Main dimensions

公称通径 DN/mm	尺寸 Size/mm									
	/In	d	L	D	D1	D2	b	Z-Ød	H	D0
15	1/2	13	152	95	70	52	14	4-Ø15	253	90
20	3/4	19	178	100	75	58	16	4-Ø15	298	100
25	1	25	203	125	90	70	16	4-Ø19	300	130
32	1 1/4	32	216	135	100	80	18	4-Ø19	315	150
40	1 1/2	38	229	140	105	85	18	4-Ø19	352	180
50	2	51	267	155	120	100	22	4-Ø19	420	200
65	2 1/2	64	292	175	140	120	24	4-Ø19	465	250
80	3	76	318	200	160	135	26	8-Ø19	490	280
100	4	102	356	225	185	160	28	8-Ø19	590	355
125	5	127	400	270	225	195	30	8-Ø23	690	405
150	6	152	444	305	260	230	32	8-Ø23	760	455
200	8	203	559	350	305	275	34	12-Ø23	1070	600